




The Pumps with Nine Lives

**Model: [340S](#)  
5 PFR PLUNGER PUMP**

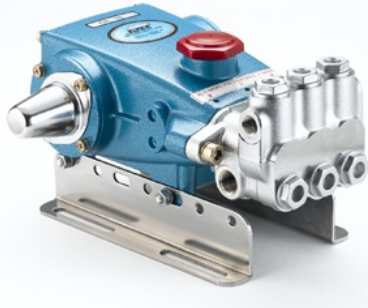

**Specs**

Max Flow:	4 gpm
Min Pressure:	100 psi
Max Pressure:	1800 psi
Inlet Port Size:	0.5
Discharge Port Size:	0.37
RPM:	1725
Drive Type(s):	Belt
Material:	Brass (BB)

**Description:**

This is a triplex (three plunger rods) positive displacement, reciprocating, plunger pump, constructed with forged Brass manifolds, 304 SS valve assemblies, solid ceramic plungers and standard NBR (Bunea-N) seals and o-rings. The manifold features stainless steel sleeves in the seal and valve chambers for extended life in harsh water conditions. The 1725 RPM permits a close coupled installation using a bell housing and flexible coupling or direct-drive motor-pump unit.

Datasheet: [310-340-350-310B-340B-350B-310S-340S-350S Data Sheet](#)

Service Manual: [5-15 Frame Plunger Service Manual](#)

**Accessories:**

**Oil**



[6107](#)

Crankcase Oil

**Regulator**



[7002](#)

Pressure Regulator

**Unloader**



[7500S](#)

Pressure Sensitive Regulating Unloader

**Relief / Pop-Off Valve**



[33962](#)

Pop-Off Valve

**Pressure Gauge**



[6088](#)

Pressure Gauge

**Pulsation Dampener**



[6029](#)

Prrrrr-O-Lator-Rechg-NBR

**Captive Acceleration Tube**



[711500](#)

Captive Acceleration Tube


#### Inlet Filter



[71044](#)

Inlet Filter

#### Flexible Inlet Hose



[990840](#)

Flexible Inlet Hose

#### Flexible Discharge Hose



[990836](#)

Flexible Discharge Hose

#### Other



[34334](#)

Oil Drain Kit