



The Pumps with Nine Lives



**Model: [717500](#)  
Captive Acceleration Tube**

**Specs**

Max Flow:	75 gpm
Min Pressure:	2 psi
Max Pressure:	50 psi
Inlet Port Size:	2.5
Discharge Port Size:	2.5
Type of Accessory:	Captive Acceleration Tube
Material:	Stainless Steel (SS)

**Description:**


The Captive Acceleration Tube (CAT) greatly enhances the life of the pump and system components whenever long feed lines, high spiking reducing valves and booster pumps are required in the system. The CAT absorbs energy from a positive head to increase liquid acceleration and stabilize inlet pump pressure. It will not correct actual pump starvation. It requires a pressurized pump inlet to function properly. (See 711502-711506 adapters for correct attachment to the pump)

**Accessory to be used with these Pumps:**

- [676060](#) FRAME PLUNGER PUMP
- [686168](#) FRAME BLOCK-STYLE PLUNGER PUMP
- [676160](#) FRAME PLUNGER PUMP
- [6861K68](#) FRAME BLOCK-STYLE PLUNGER PUMP



[677160](#) FRAME PLUNGER PUMP

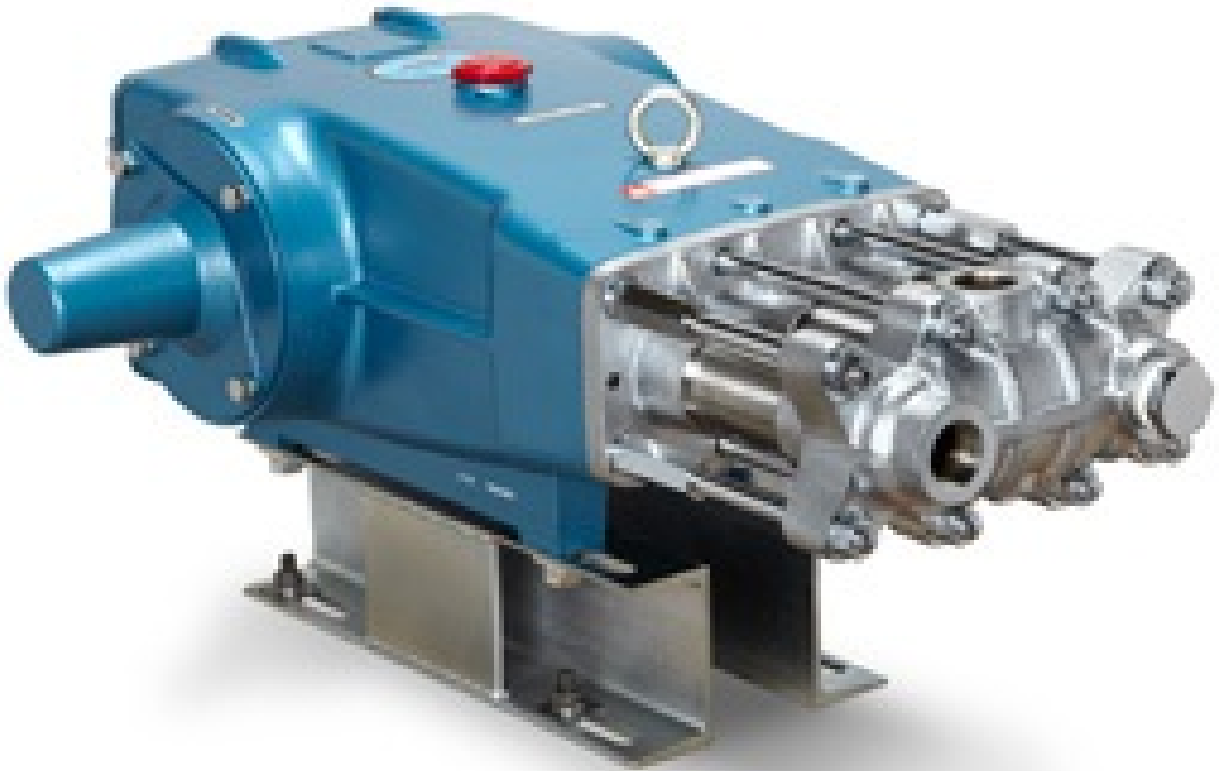

[602060](#) FRAME PISTON PUMP



[674760](#) FRAME PLUNGER PUMP

[677560](#) FRAME PLUNGER PUMP



[677760](#) FRAME PLUNGER PUMP

[684168](#) FRAME BLOCK-STYLE PLUNGER PUMP





[676760](#) FRAME PLUNGER PUMP