

Model: [7600S](#)

Pressure Sensitive Regulating Unloader



Specs

Max Flow:	5 gpm
Min Pressure:	100 psi
Max Pressure:	3500 psi
Inlet Port Size:	0.37
Discharge Port Size:	0.37
Type of Accessory:	Unloader
Material:	Brass (BB)

Description:

This Pressure Regulating Unloader is designed for single gun or pump operation. This unloader maintains set system pressure and goes into by-pass with the release of the trigger or an obstruction downstream. The pressure sensitive feature permits a wide range of flows and quickly resumes full pressure when the gun is opened or the obstruction cleared. It is recommended for intermittent cleaning applications. It is NOT recommended for weep systems. 5-10% by-pass is necessary for optimum performance.

Accessory to be used with these Pumps:

[3CP1120G3CP PUMP WITH GEARBOX](#)



[4SF32ELS](#) 4SF DIRECT DRIVE PLUNGER PUMPS



[4SF40ELS](#) 4SF DIRECT DRIVE PLUNGER PUMPS



[4SF45ELS](#) 4SF DIRECT DRIVE PLUNGER PUMPS



[4SF50ELS](#) 4SF DIRECT DRIVE PLUNGER PUMPS




[4SF30GS1](#) OBSOLETE 4SF DIRECT DRIVE PLUNGER PUMPS




[4SF40GS14SF](#) DIRECT DRIVE PLUNGER PUMPS



[4SF35GS14SF](#) DIRECT DRIVE PLUNGER PUMPS

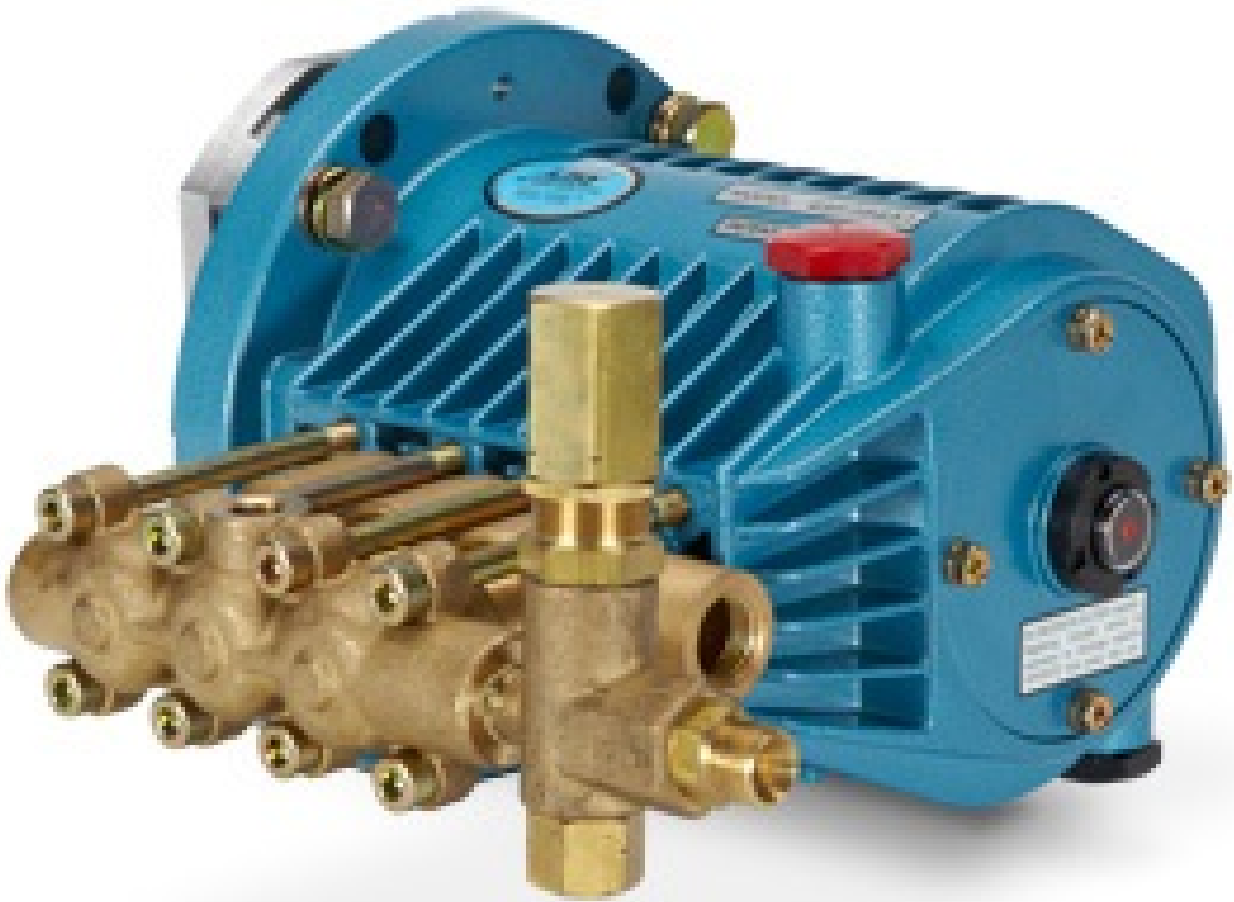

[4SF45GS14SF](#) DIRECT DRIVE PLUNGER PUMPS

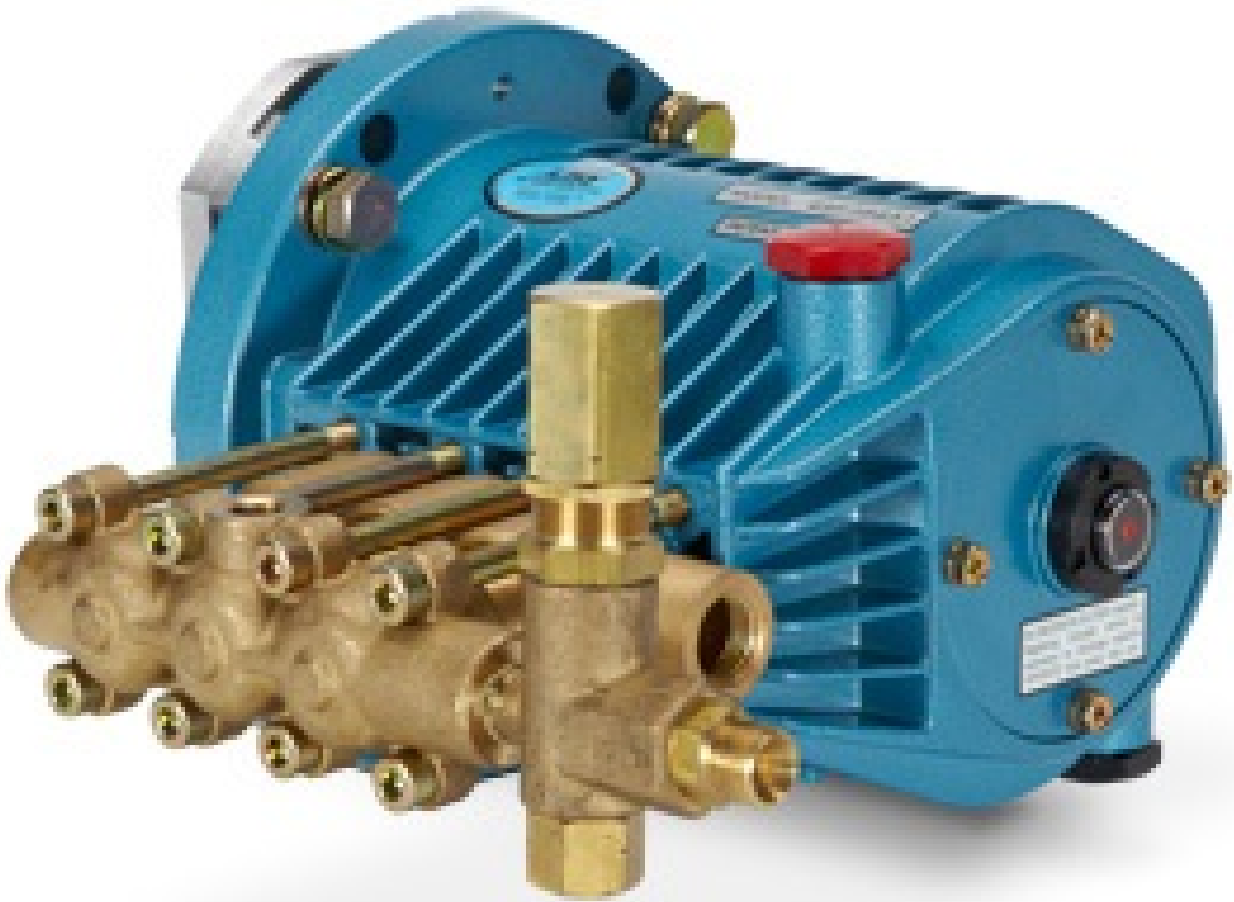

[4SF50GS14SF](#) DIRECT DRIVE PLUNGER PUMPS



[4SF45GS1184SF](#) DIRECT DRIVE PLUNGER PUMPS



[3CP11203CP](#) PLUNGER PUMP



[3CP11303CP](#) PLUNGER PUMP



[3CP11403CP](#) PLUNGER PUMP