



The Pumps with Nine Lives



Model: [890710](#)
SS Pop-off Valve

Specs

Max Flow:	100 gpm
Min Pressure:	100 psi
Max Pressure:	1500 psi
Inlet Port Size:	1
Discharge Port Size:	1
Type of Accessory:	Relief / Pop-Off Valve
Material:	Stainless Steel (SS)

Description:

This stainless steel pop-off valve is designed as a secondary pressure relief and should be used with a primary pressure regulating valve. It is set approx 200 PSI above the primary valve and will only go into by-pass should the primary valve fail.

Accessory to be used with these Pumps:

[6761](#)60 FRAME PLUNGER PUMP


[6762](#)60 FRAME PLUNGER PUMP

[6861](#)68 FRAME BLOCK-STYLE PLUNGER PUMP

[6861K](#)68 FRAME BLOCK-STYLE PLUNGER PUMP



[6777](#)60 FRAME PLUNGER PUMP

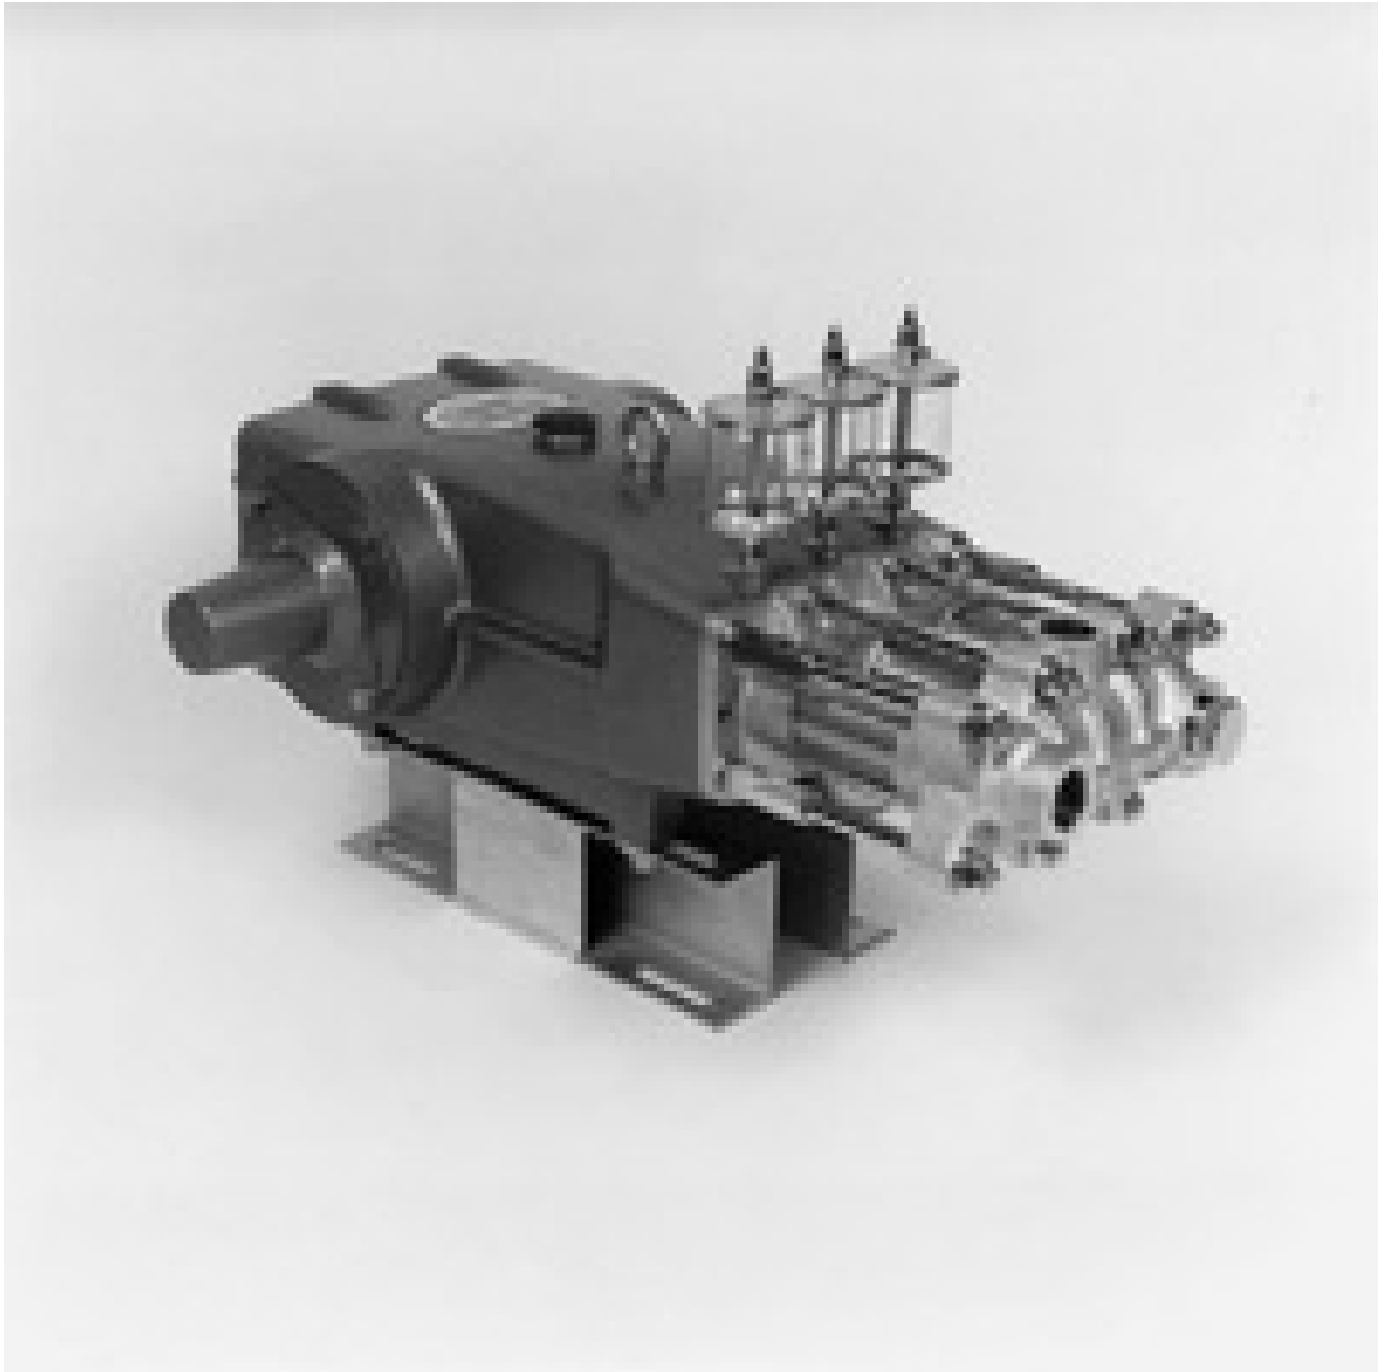

[602160](#) FRAME PISTON PUMP



[676760](#) FRAME PLUNGER PUMP



[677160](#) FRAME PLUNGER PUMP