

**Model: [990845](#)
Flexible Inlet Hose**



Specs

Max Flow:	10 gpm
Min Pressure:	100 psi
Max Pressure:	200 psi
Inlet Port Size:	0.5
Discharge Port Size:	0.5
Type of Accessory:	Flexible Inlet Hose
Material:	Stainless Steel (SS)

Description:

Flexible hose should be installed at the inlet of the pump. If supply tank is more than 5-6 Feet or a booster pump is required, replace the flexible inlet hose with a C.A.T. Excessive elbows, tees and hard plumbing can cause restrictions and liquid acceleration loss and result in excessive vibration, water hammering, starvation and cavitation damage within the pump.


Accessory to be used with these Pumps:



[1810K](#) 18 FRAME BLOCK-STYLE PLUNGER PUMP



[2813](#) FRAME PISTON PUMP

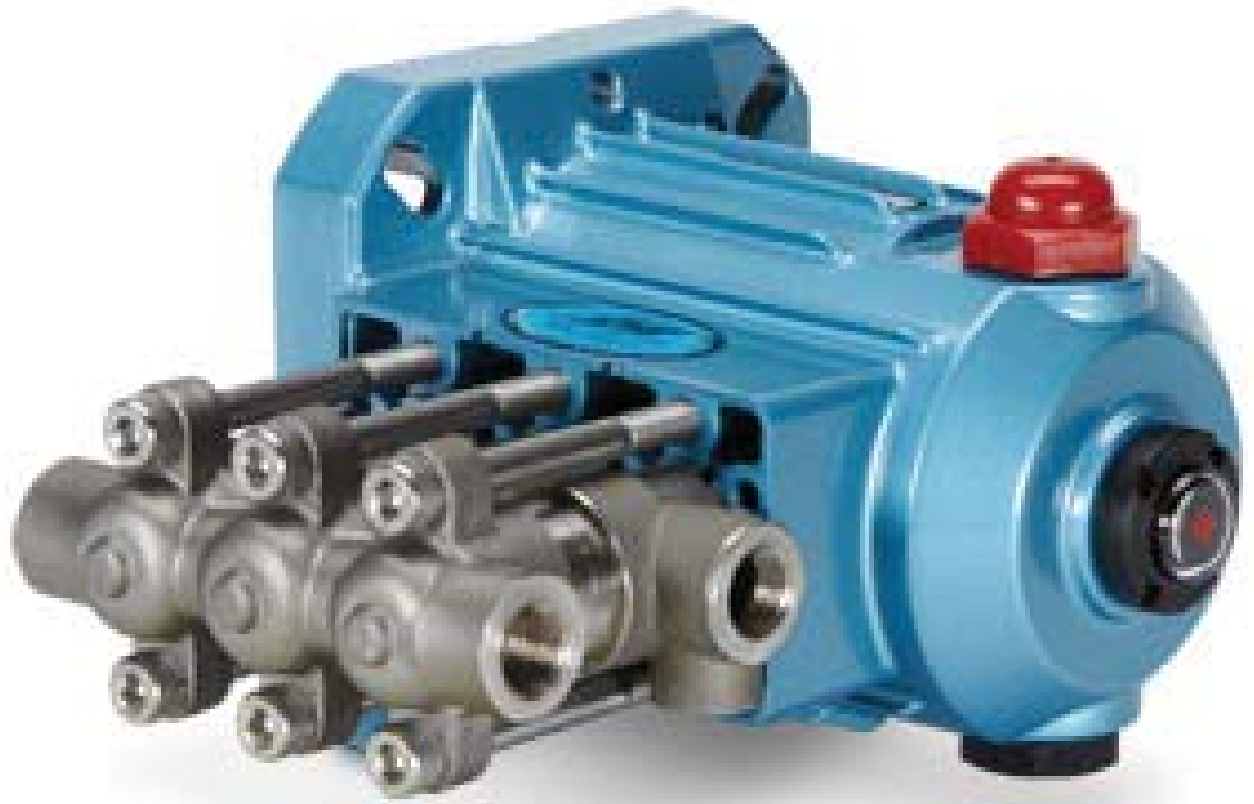


[2SF10SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS

[4314](#) FRAME PISTON PUMP

[3314](#) FRAME PISTON PUMP




[781K8](#) FRAME BLOCK-STYLE PLUNGER PUMP

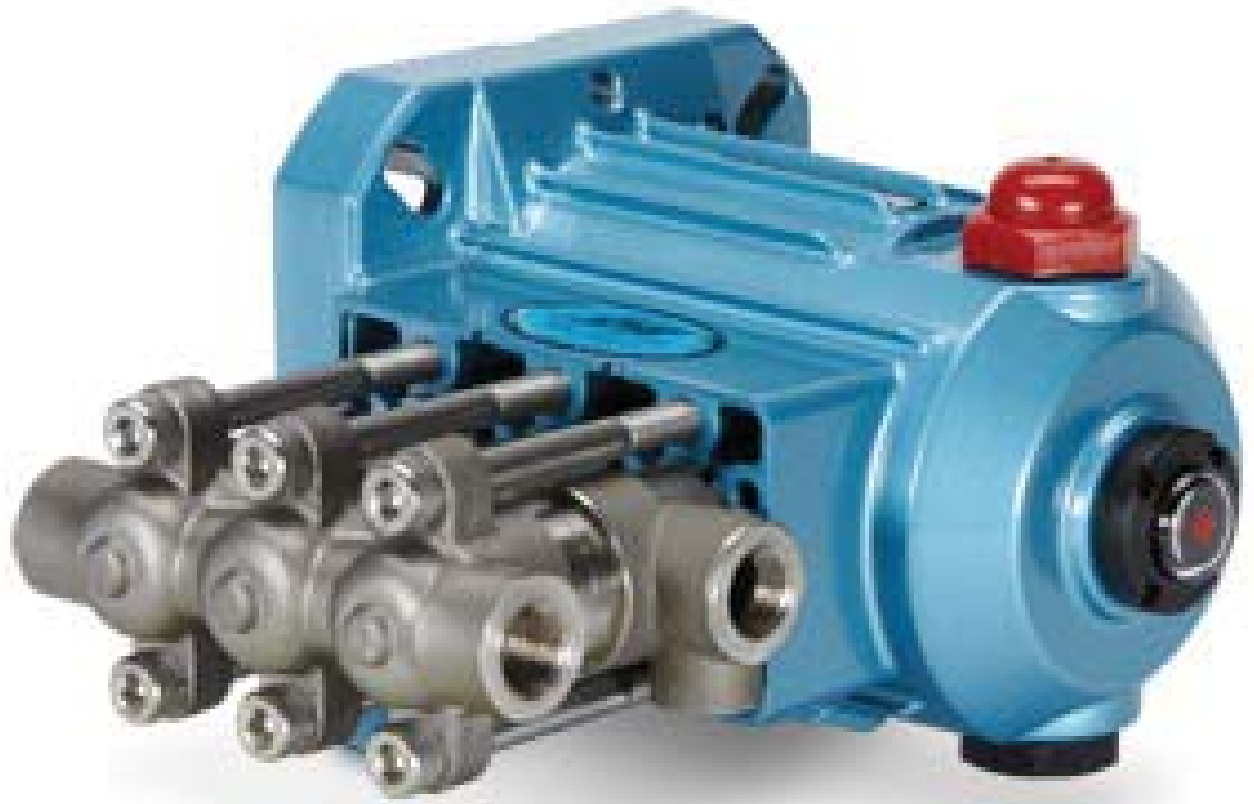


[2SF15SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS




[2913](#) FRAME PISTON PUMP

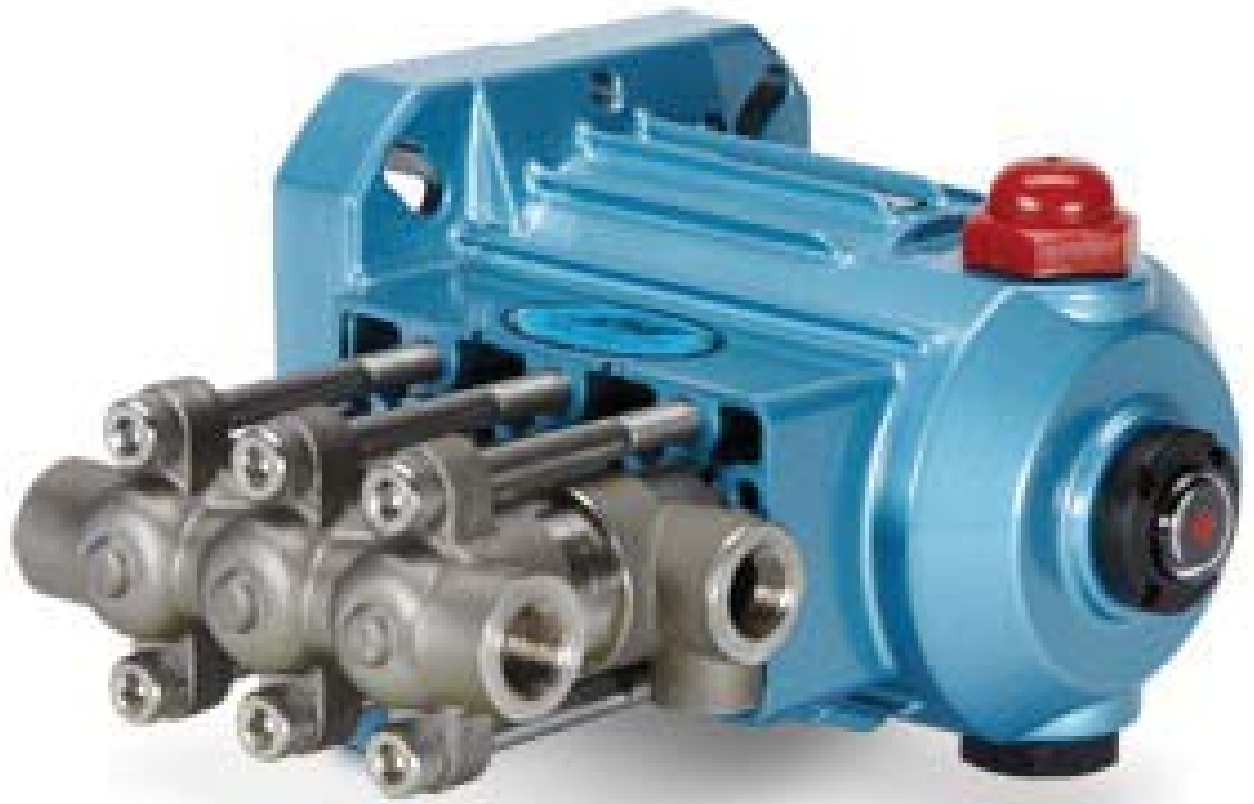

[2SF25SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS

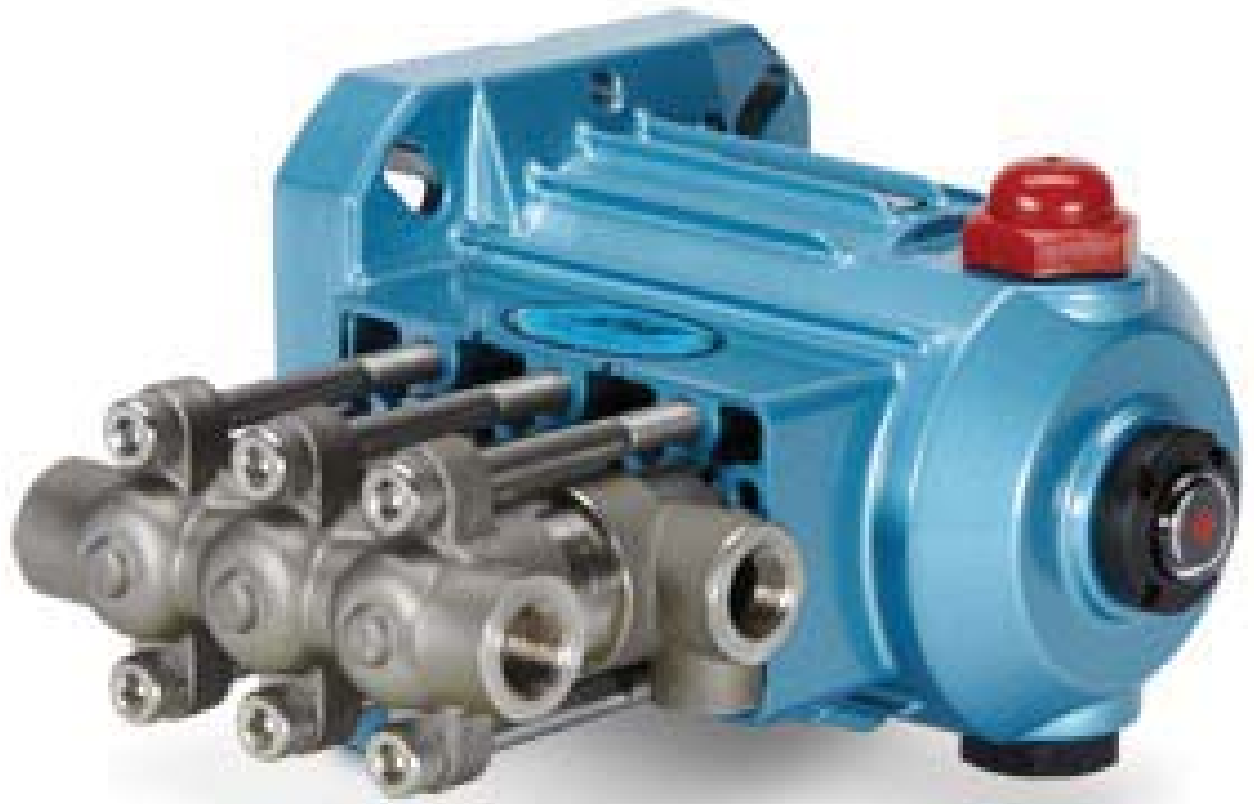

[2SF29SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS

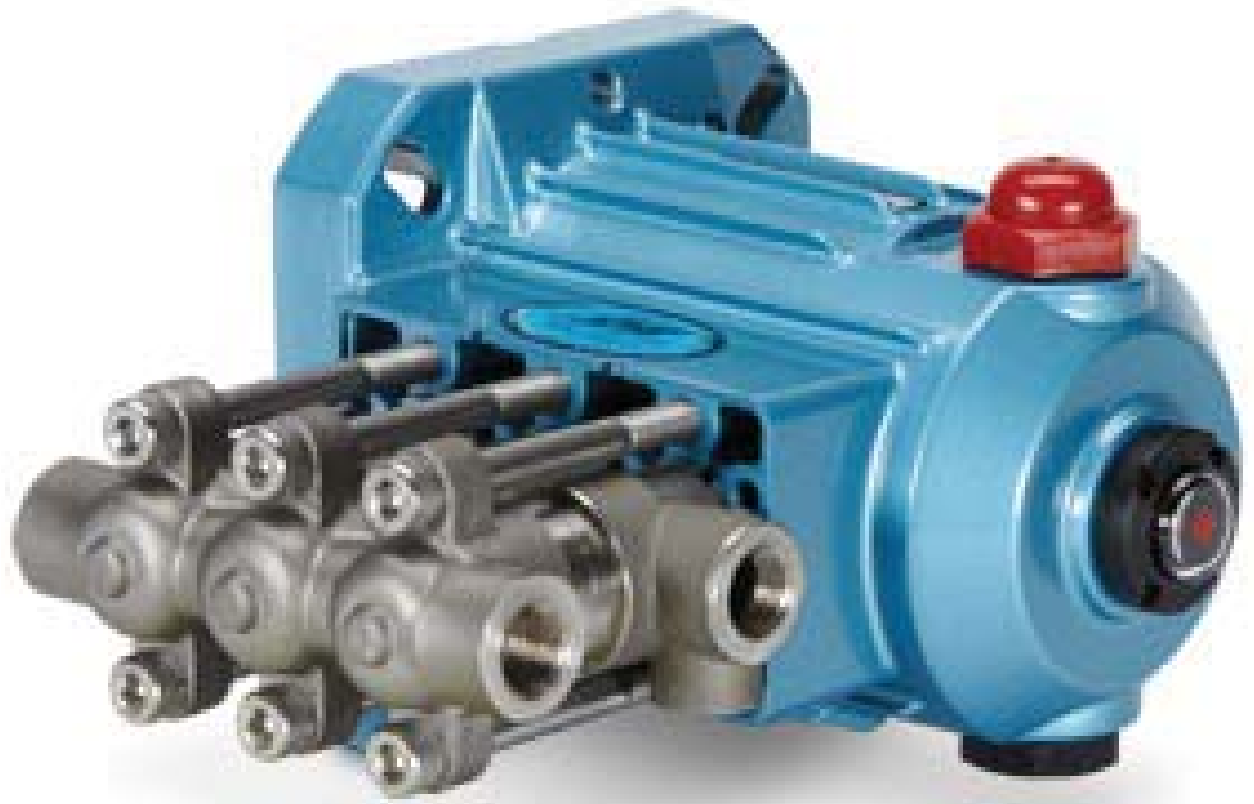

[2SF35SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS




[5CP62215CP](#) PLUNGER PUMP



[5CP6241CS5CP](#) PLUNGER PUMP



[5CP62515CP](#) PLUNGER PUMP

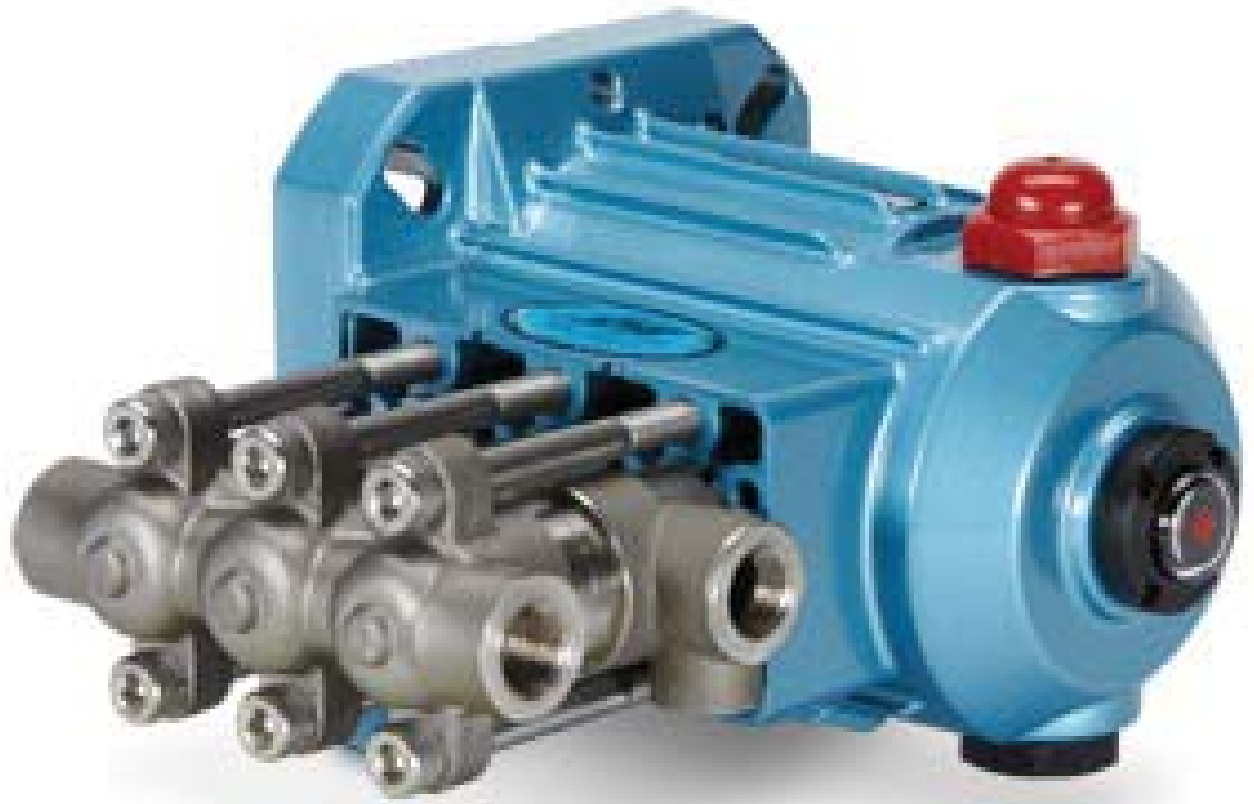

[2SF05SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS



[3CP12313CP](#) PLUNGER PUMP



[3CP12413CP PLUNGER PUMP](#)

[3115 FRAME PLUNGER PUMP](#)



[3415 FRAME PLUNGER PUMP](#)

[3515 FRAME PLUNGER PUMP](#)



[3175](#) FRAME PLUNGER PUMP



[3475](#) FRAME PLUNGER PUMP



[3575](#) FRAME PLUNGER PUMP



[2313](#) FRAME PLUNGER PUMP

[2373](#) FRAME PLUNGER PUMP

[2473](#) FRAME PLUNGER PUMP



[2713 FRAME PLUNGER PUMP](#)


[2773 FRAME PLUNGER PUMP](#)




[3CP12213CP](#) PLUNGER PUMP



[311C5](#) FRAME FLUSHED PLUNGER PUMP

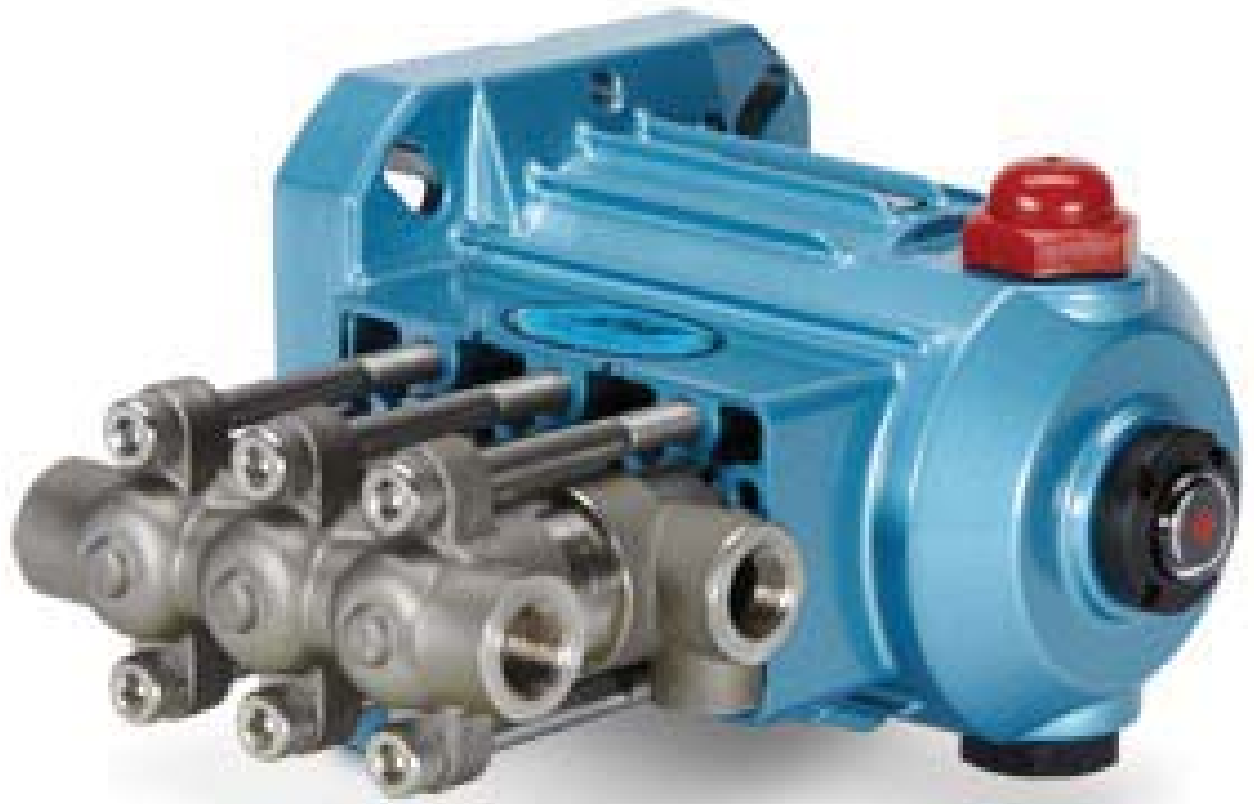

[2SF42SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS

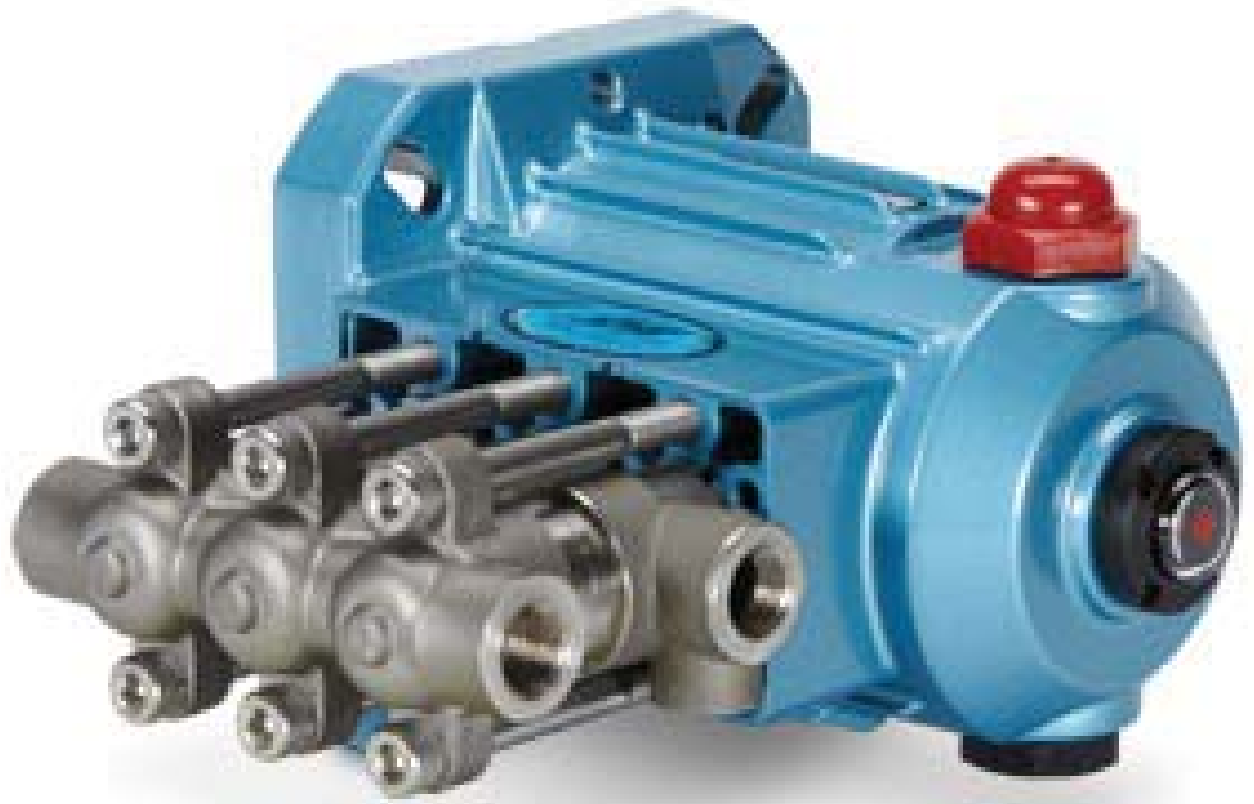

[2SF22SEEL2SF](#) DIRECT DRIVE PLUNGER PUMPS



[2413](#) FRAME PLUNGER PUMP