

Model: [990855](#)

Flexible Discharge Hose



Specs

Max Flow:	70 gpm
-----------	--------

Min Pressure:	100 psi
---------------	---------

Max Pressure:	3000 psi
---------------	----------

Inlet Port Size:	1.25
------------------	------

Discharge Port Size:	1.25
----------------------	------

Type of Accessory:	Flexible Discharge Hose
--------------------	-------------------------

Material:	Stainless Steel (SS)
-----------	----------------------

Description:

Flexible hose should be installed in the discharge line prior to any hard plumbing. Excessive elbows, tees and hard plumbing can cause restrictions and liquid acceleration loss and result in excessive vibration and water hammering and damage within the pump.

Accessory to be used with these Pumps:



[677760](#) FRAME PLUNGER PUMP



[6771](#)60 FRAME PLUNGER PUMP

[6841](#)68 FRAME BLOCK-STYLE PLUNGER PUMP

[6841K](#)68 FRAME BLOCK-STYLE PLUNGER PUMP


[6861](#)68 FRAME BLOCK-STYLE PLUNGER PUMP

[6861K](#)68 FRAME BLOCK-STYLE PLUNGER PUMP

[6761](#)60 FRAME PLUNGER PUMP



[676760](#) FRAME PLUNGER PUMP

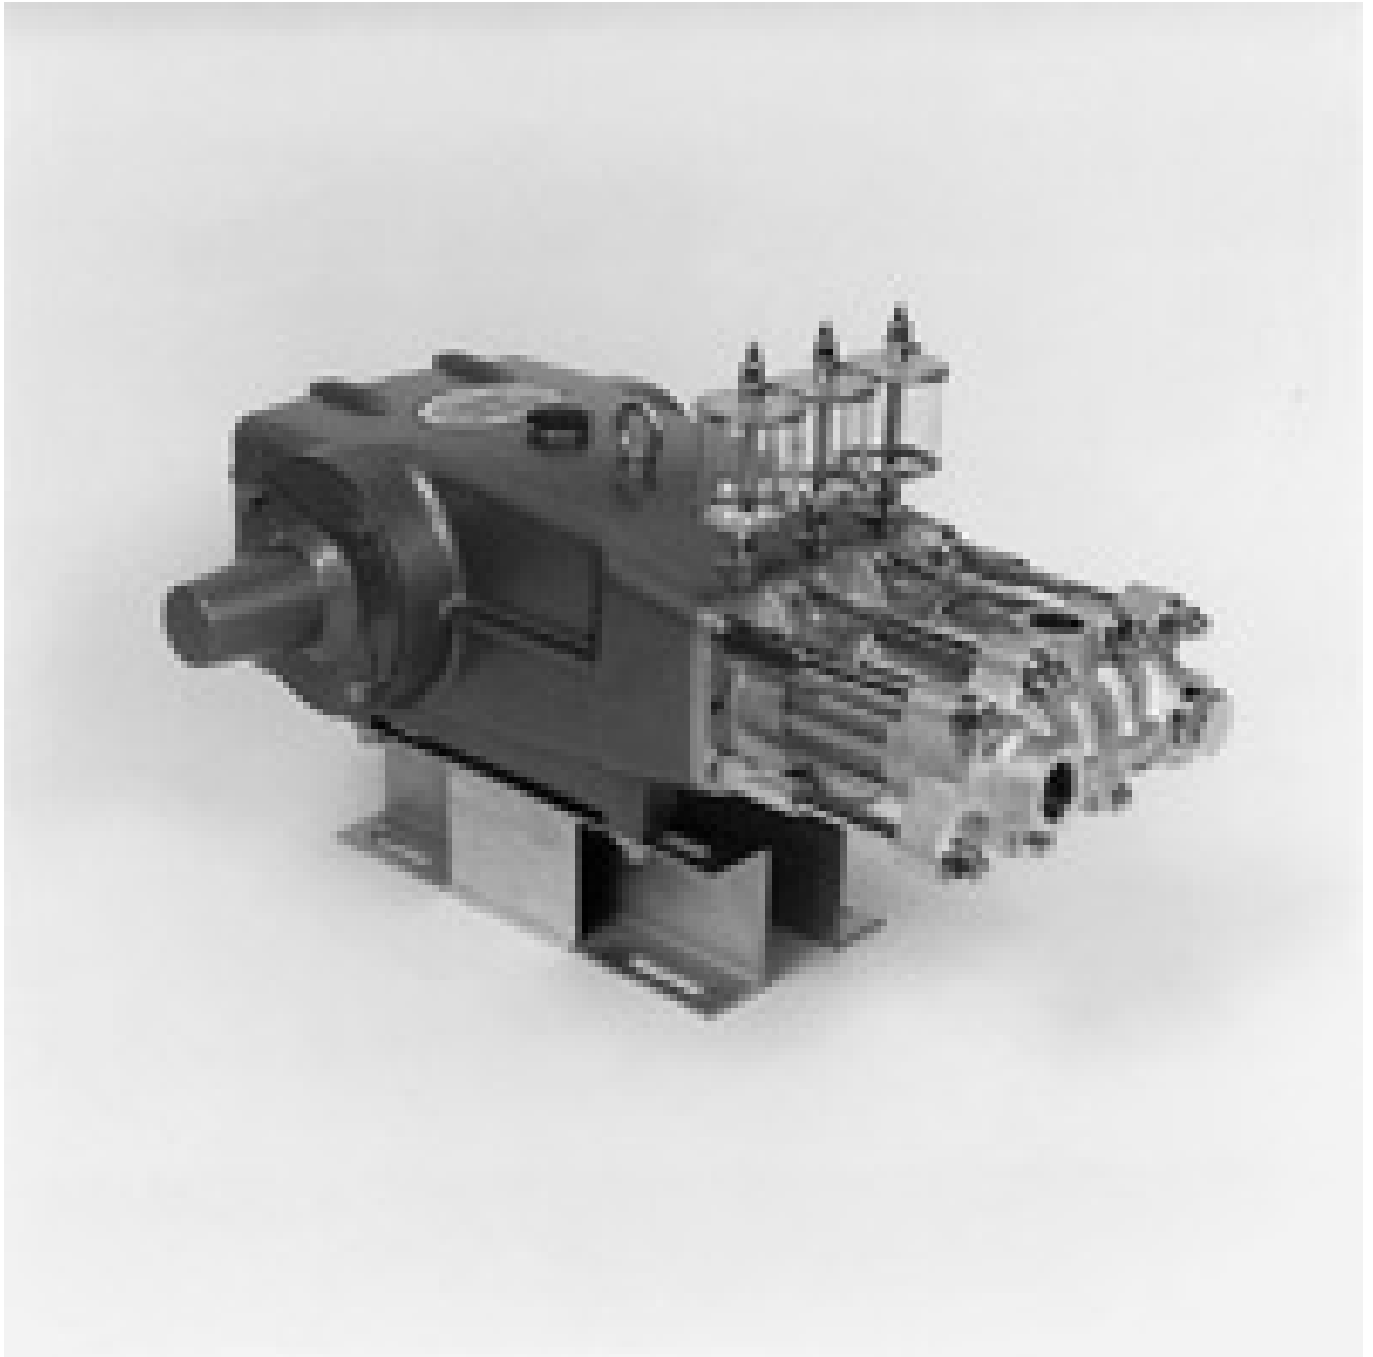


[6021](#)60 FRAME PISTON PUMP



[683568](#) FRAME BLOCK-STYLE PLUNGER PUMP



[6835K68](#) FRAME BLOCK-STYLE PLUNGER PUMP

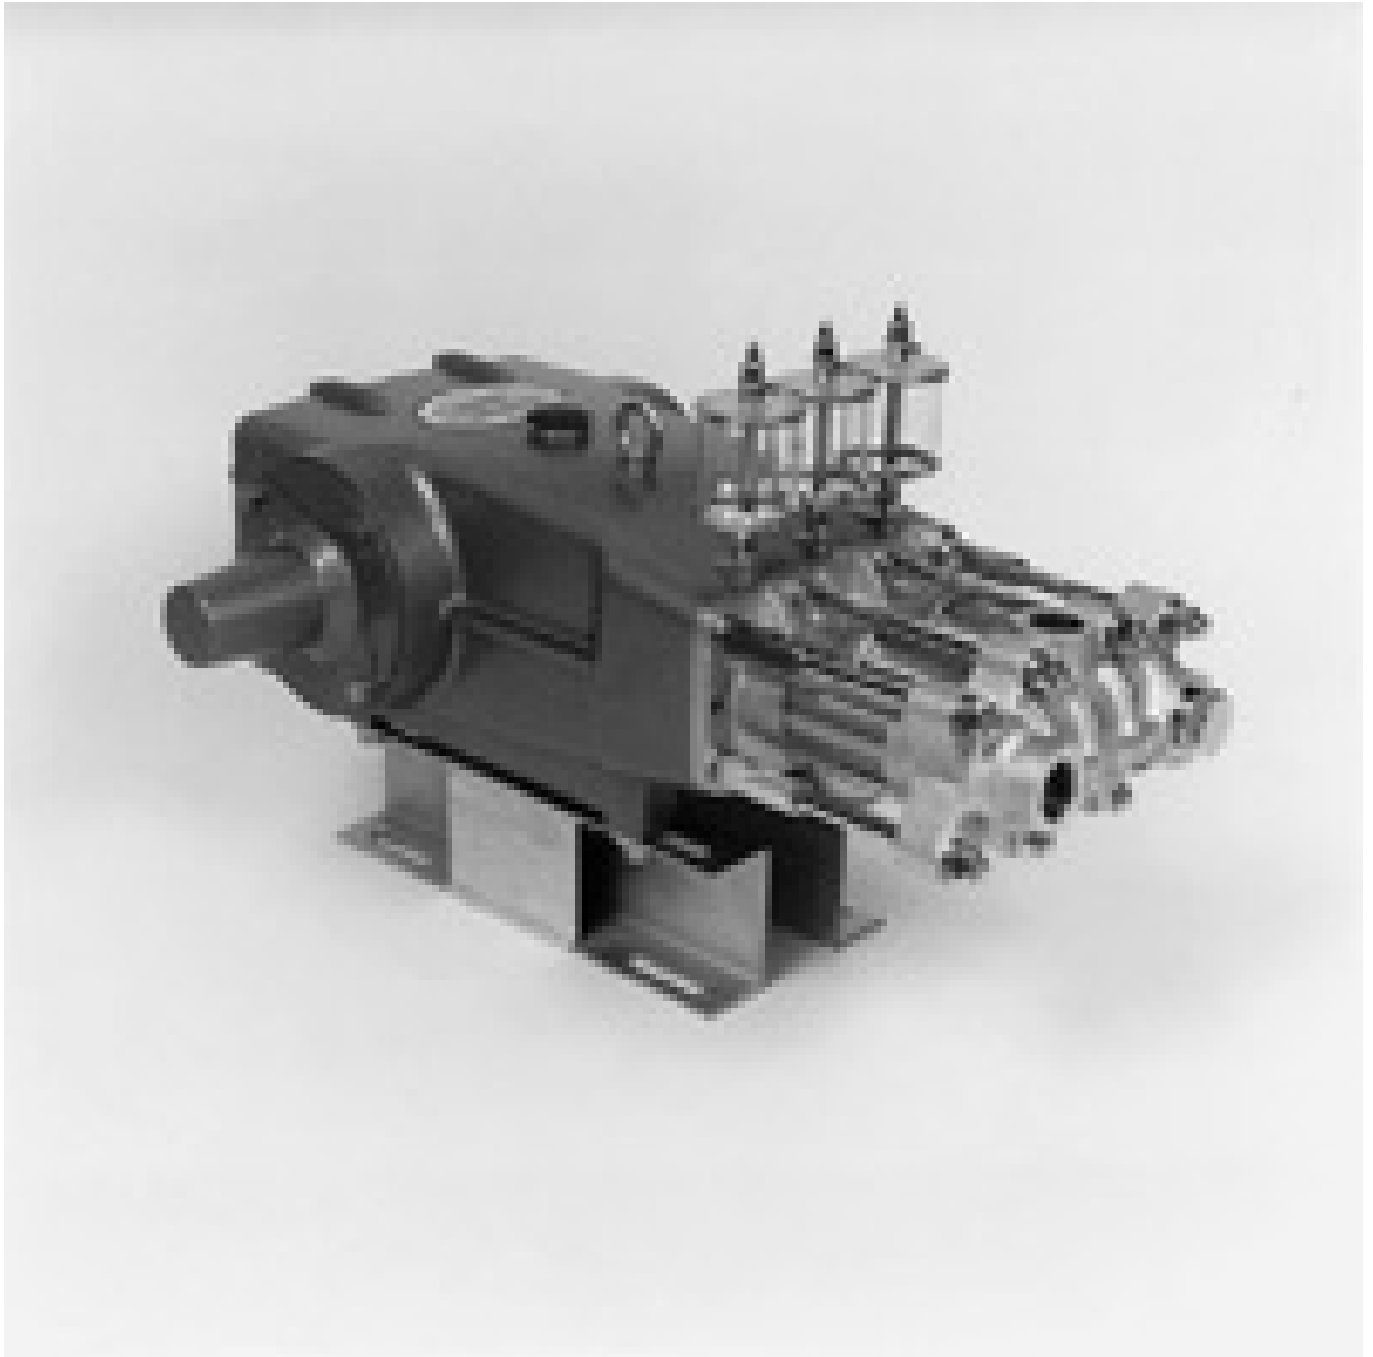

[6041](#)60 FRAME PISTON PUMP



[683168](#) FRAME BLOCK-STYLE PLUNGER PUMP



[6747](#)60 FRAME PLUNGER PUMP

[6762](#)60 FRAME PLUNGER PUMP



[6821K68](#) FRAME BLOCK-STYLE PLUNGER PUMP



[6831K68](#) FRAME BLOCK-STYLE PLUNGER PUMP



[682168](#) FRAME BLOCK-STYLE PLUNGER PUMP