

WT™ Series

Food Grade PVC

Material Handling Hose

General Applications:

- Food grade liquids such as potable water, beer, wine and juice
- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment
- Poultry processing

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Superior Product Design** – Tigerflex™ WT™ series hoses are an industry standard for pneumatic material handling due to our specially engineered compound, innovative design and uncompromising quality control. Provides the ideal combination of light weight, flexibility and durability.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹¹⁾ for use in meat and poultry plants.



Phthalate FREE



- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
WT100	1	25.4	1.30	33.0	55	30	28	28	2	100/50	0.21
WT125	1¼	31.7	1.60	40.6	50	25	28	28	2	100/50	0.28
WT150	1½	38.1	1.92	48.8	50	25	28	28	3	100/50	0.35
WT200	2	50.8	2.40	61.0	40	20	28	24	4	100/50	0.56
WT225	2¼	57.2	2.74	69.6	40	20	28	24	4.5	100/50	0.65
WT250	2½	63.5	2.99	75.9	40	20	28	24	5	100/50	0.77
WT300	3	76.2	3.64	92.5	40	20	28	24	6	100/50	1.10
WT350	3½	88.9	4.21	107.0	35	18	28	24	8	100/50	1.48
WT400	4	101.6	4.72	120.0	35	18	24	22	10	100/50	1.80
WT500	5	127.0	5.74	145.8	30	15	24	22	16	100/50/20	2.34
WT600	6	152.4	6.91	175.5	30	15	24	22	18	100/50/20	3.70
WT800	8	203.2	8.97	227.8	20	10	20	18	36	50/20	5.53
WT45M	1.77	45.0	2.09	53.0	45	25	28	24	4	50	0.44
WT57M	2.24	57.0	2.68	68.0	40	20	28	24	4.5	50	0.64

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



ABRASION RESISTANT



FOOD GRADE



STATIC DISSIPATIVE



TRANSPARENT CONSTRUCTION



WATER



Made in USA



Features and Advantages:

- **Superior Product Design** – Tigerflex™ WE™ series hoses are an industry standard for pneumatic material handling, due to our specially engineered compound, innovative design and uncompromising quality control. Provides the ideal combination of light weight, flexibility and durability.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ requirements. Hose approved by USDA⁽¹¹⁾ for use in meat and poultry plants.

WE™ Series

Food Grade PVC

Material Handling Hose

With Grounding Wire

NEW LENGTHS

General Applications:

- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

Construction: PVC tube with rigid PVC helix and grounding wire.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
WE100	1	25.4	1.30	33.0	55	30	25	28	2	100/50	0.21
WE125	1¼	32.0	1.65	42.0	50	25	28	28	2	100/60/50	0.33
WE150	1½	38.1	1.93	49.0	50	25	28	28	3	100/60/50	0.43
WE200	2	50.8	2.48	63.0	40	20	28	24	4	100/60/50	0.58
WE225	2¼	57.2	2.80	71.0	40	20	28	24	4.5	100/60/50	0.65
WE250	2½	63.5	3.07	76.5	40	20	28	24	5	100/60/50	0.89
WE300	3	76.2	3.64	91.5	40	20	28	24	6	100/60/50	1.25
WE350	3½	88.9	4.27	108.5	35	18	28	24	8	100/60/50	1.55
WE400	4	101.6	4.72	120.0	35	18	24	20	10	100/60/50	1.93
WE500	5	127.0	5.74	146.0	30	15	24	20	16	60/50/20	2.40
WE600	6	152.4	6.81	175.5	30	15	24	20	18	60/50/20	3.70
WE800	8	204.8	9.06	230.0	20	10	20	18	36	20	5.62
WE45M	1.77	45.0	2.20	55.8	45	25	28	24	4	60	0.46
WE57M	2.24	57.0	2.76	70.0	40	20	28	24	4.5	60	0.64

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.


BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



2001™ Series

Heavy Duty Food Grade Polyurethane Lined Material Handling Hose With Grounding Wire

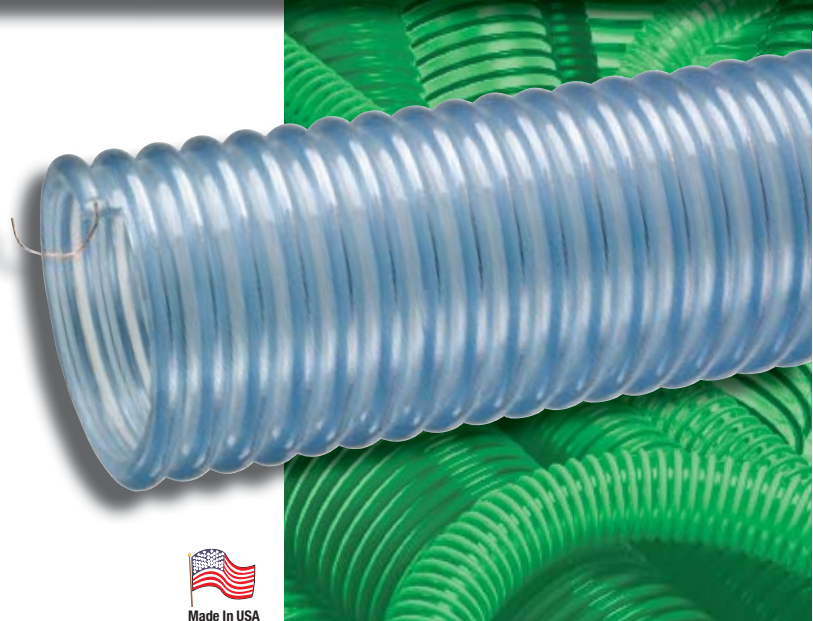

General Applications:

- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

Construction: PVC cover with polyurethane liner, rigid PVC helix and grounding wire.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Extra Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Food Grade Materials** – Hose cover complies with applicable FDA⁽⁰³⁾ requirements. Hose liner complies with applicable FDA⁽⁰⁴⁾ requirements. Hose approved by USDA⁽¹²⁾ for use in meat and poultry plants.
- **Now Phthalate Free!**
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convoluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
2001-150	1½	38.1	1.88	47.8	50	25	Full	28	6	60	0.48
2001-200	2	50.8	2.44	62.0	40	20	Full	28	7	60	0.67
2001-250	2½	63.5	3.12	77.2	40	20	Full	28	8	60	0.92
2001-300	3	76.2	3.70	94.1	40	20	Full	28	9	60	1.35
2001-400	4	101.6	4.80	122.0	35	18	Full	28	15	60/20	2.17
2001-500	5	127.0	5.81	147.6	35	18	28	25	23	60/20	2.77
2001-600	6	152.4	6.93	176.0	30	15	28	25	26	60/20	3.90
2001-700	7	178.8	8.08	205.2	30	15	28	25	30	60/20	5.20
2001-800	8	203.2	9.28	235.8	30	15	28	25	36	20	6.65

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, FDA⁽⁰⁴⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



ABRASION RESISTANT PLUS



"COLD-FLEX" MATERIALS



EASY SLIDE



FOOD GRADE



OIL RESISTANT



STATIC DISSIPATIVE



TRANSPARENT CONSTRUCTION



VOLT™ Series

Heavy Duty Food Grade Static Dissipative Polyurethane Material Handling Hose



Phthalate FREE

General Applications:

- Bulk truck and railcar unloading
- Fly ash collection
- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

Construction: Static dissipative polyurethane tube, rigid helix and grounding wire (patent pending).

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*

Features and Advantages:

- **Superior Static Protection!** – A properly grounded Voltbuster™ hose will not retain an electrostatic charge sufficient to create a propagating brush discharge. Hose material, using the embedded grounding wire, shows a charge decay time constant of < 1 second, based on independent lab testing.
- **Food Grade Materials** – Hose tube complies with FDA⁽⁰⁵⁾ requirements. Grounding wire embedded in external helix to prevent material contamination.
- **Extra Thick Abrasion Resistant Single-Ply Polyurethane Tube** – Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from wear; allows hose to slide easily over rough surfaces. Easy to handle.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
VOLT150	1-1/2	38.35	1.87	47.5	40	20	Full	28	2	100/60	0.31
VOLT200	2	51.1	2.52	63.9	40	20	Full	28	6	100/60	0.61
VOLT250	2-1/2	63.75	2.96	75.2	40	20	Full	28	7	100	0.76
VOLT300	3	76.2	3.60	91.4	40	20	Full	28	9	100/60	0.91
VOLT400	4	101.6	4.69	121.0	35	17	28	25	12	100/60/20	1.70
VOLT500	5	127.0	5.75	146.8	35	17	28	25	14	60/20	2.13
VOLT600	6	153.4	6.81	173.2	30	15	25	20	16	60/20	2.53
VOLT800	8	203.5	8.76	223.3	30	15	25	20	18	60/20	3.30

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰⁵⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



NEW
2" & 8" SIZES

2020™ Series

Heavy Duty Food Grade Polyurethane Fabric Reinforced Material Handling Hose With Grounding Wire

General Applications:

- Bulk truck and railcar unloading
- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Suction and discharge

Construction: Extra thick double-ply polyurethane tube, polyester fabric reinforcement, rigid PVC helix and grounding wire.

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*



Features and Advantages:

- **Extra Thick Abrasion Resistant Double-Ply Polyurethane Tube** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Food Grade Materials** – Hose liner complies with applicable FDA⁽⁰⁴⁾ requirements. Hose approved by USDA⁽¹²⁾ for use in meat and poultry plants.
- **Fabric Reinforcement** – Designed with high tensile strength, food grade⁽⁰⁵⁾, polyester yarn jacket to handle both suction, and higher pressure discharge applications.
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
2020-200	2	50.1	2.65	67.5	75	40	Full	28	9	100	0.94
2020-300	3	76.2	3.78	96.0	70	35	Full	28	10	100/50/20	1.20
2020-400	4	101.6	4.84	123.0	65	30	Full	28	12	100/50/20	1.60
2020-500	5	127.0	5.79	147.0	45	22	28	25	14	50/25/20	2.45
2020-600	6	152.4	6.93	176.0	40	22	28	25	16	50/25/20	2.86
2020-800	8	206.0	9.21	234.0	30	15	24	20	22	100	1.72

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰⁴⁾, FDA⁽⁰⁵⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



ABRASION RESISTANT PLUS



"COLD-FLEX" MATERIALS



EASY SLIDE



FOOD GRADE




OIL RESISTANT



STATIC DISSIPATIVE



TRANSPARENT CONSTRUCTION

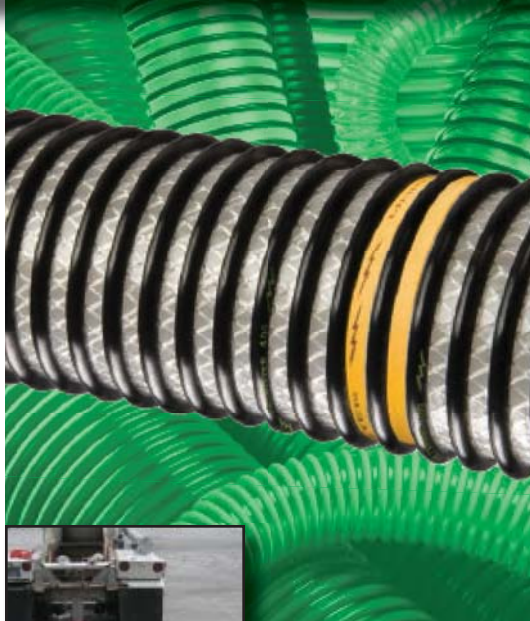

VLT-SD™ Series

Heavy Duty Food Grade Static Dissipative Polyurethane Fabric Reinforced Material Handling Hose

General Applications:

- Bulk truck and railcar unloading
- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Plastic processing equipment
- Pneumatic conveying equipment
- Suction and discharge

Construction: Static dissipative polyurethane tube, polyester fabric reinforcement, rigid helix and grounding wire (patent pending).

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*



Phthalate FREE

Features and Advantages:

- **Superior Static Protection!** – A properly grounded Voltbuster™ hose will not retain an electrostatic charge sufficient to create a propagating brush discharge. Hose material, using the embedded grounding wire, shows a charge decay time constant of < 1 second, based on independent lab testing.
- **Food Grade Materials** – Hose tube complies with FDA⁽⁰⁵⁾ requirements. Grounding wire embedded in external helix to prevent material contamination.
- **Extra Thick Abrasion Resistant Double-Ply Polyurethane Tube** – Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Now Phthalate Free!**
- **Fabric Reinforcement** – Designed with high tensile strength, food grade FDA⁽⁰⁶⁾, polyester yarn jacket to handle both suction, and higher pressure discharge applications.
- **Transparent Construction** – “See-the-flow”. Allows for visual conformation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose from wear; allows hose to slide easily over rough surfaces. Easy to handle.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
VLT-SD200	2	51.1	2.67	67.0	75	40	Full	28	9	100/50	0.77
VLT-SD300	3	77.0	3.78	96.0	70	35	Full	28	12	100/20	1.22
VLT-SD400	4	102.2	4.84	123.0	65	30	Full	28	13	100/60/20	1.85
VLT-SD500	5	128.0	5.79	152.0	45	22	28	25	14	60/20	2.43
VLT-SD600	6	153.4	6.93	177.4	40	22	28	25	17	60/20	3.05
VLT-SD800	8	206.0	9.25	235.0	35	25	26	20	23	20	4.70

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰⁵⁾, FDA⁽⁰⁶⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

WBS™ Series

Food Grade PVC Static Dissipative Material Handling Hose



General Applications:

- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

Construction: Static dissipative PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Abrasion Resistant PVC Tube** – Formulated from highly durable PVC compounds for increased abrasion resistance.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ requirements. Hose approved by USDA⁽¹¹⁾ for use in meat and poultry plants.
- **Static Dissipative Tube** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
WBS150	1½	38.1	1.92	48.8	50	25	28	28	3	100	0.35
WBS200	2	50.8	2.40	61.0	40	20	28	24	4	100	0.56
WBS250	2½	63.5	2.99	75.9	40	20	28	24	5	100	0.77
WBS300	3	76.2	3.64	92.5	40	20	28	24	6	100	1.10
WBS400	4	101.6	4.76	121.0	35	20	24	20	10	100/50	1.92

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: The effectiveness of static dissipation is application-dependent, based upon humidity, material conveyed, and length of hose.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



EASY SLIDE



FOOD GRADE



TRANSPARENT CONSTRUCTION



WATER



NEW
UPDATED WORKING
PRESSURES!

WSTF™ Series

Food Grade PVC Fabric Reinforced Suction & Discharge Hose

General Applications:

- Food grade liquids such as potable water, beer, wine and juice
- Food grade material handling – standard duty
- Ice transfer
- Suction and discharge
- Water suction – heavy duty

Construction: Double-ply PVC tube, polyester fabric reinforcement and rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*



Made in USA

**Phthalate
FREE**

Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹²⁾ for use in meat and poultry plants.
- **Fabric Reinforcement** – Designed with high tensile strength, food grade, FDA⁽⁰⁶⁾ polyester yarn jacket to handle both suction, and higher pressure discharge applications.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (In. Hg)		Approx. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
WSTF150	1-1/2	38.1	1.95	49.5	110	70	Full	28	2.5	100	0.42
WSTF200	2	50.8	2.60	66.0	100	65	Full	28	4	100	0.74
WSTF300	3	76.2	3.62	92.0	100	50	Full	28	6	100/20	1.13
WSTF400	4	101.6	4.76	121.0	75	37	Full	28	8	100/20	1.74
WSTF600	6	152.4	7.17	182.1	70	35	28	25	13	100/20	3.88

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, FDA⁽⁰⁶⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

MILK™ Series

Food Grade
PVC Liquid Suction Hose

MILK-LT™ Series

Low Temperature
Food Grade
PVC Liquid Suction Hose


MILK

MILK-LT
(low temp)



Made In USA

Phthalate FREE



General Applications:

- Food grade liquids such as potable water, beer, wine and juice
- Ice transfer
- Milk and dairy product transfer
- Water suction – standard duty

Construction: PVC tube with rigid PVC helix.

Service Temperature (MILK): -4°F (-20°C) to 150°F (+65°C)*

Service Temperature (MILK-LT): -40°F (-40°C) to 150°F (+65°C)*

Features and Advantages:

- **Precision Controlled ID and OD Dimensions** – Facilitates insertion of sanitary fittings.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹¹⁾ for use in meat and poultry plants.
- **"Cold-Flex" Materials (MILK-LT only)** – Hose remains flexible in severe sub-zero temperatures.
- **Transparent Construction** – "See-the-flow." Allows for visual confirmation of material flow.
- **Smooth Outer Cover** – Provides increased pressure rating and smooth surface for banding.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Approx. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
MILK150	1½	38.1	1.79	45.5	75	50	Full	26	4	100	0.45
MILK200	2	50.8	2.33	59.2	75	50	28	25	6	100	0.63
MILK250	2½	63.5	2.87	73.0	55	40	28	24	10	100	0.81
MILK300	3	76.2	3.42	86.9	55	40	28	24	11	100	1.18
MILK-LT150	1½	38.1	1.79	45.5	75	50	Full	26	4	100	0.45
MILK-LT200	2	50.8	2.33	59.2	75	50	28	25	5	100	0.65
MILK-LT250	2½	63.5	2.87	73.0	55	40	28	24	8	100	0.84
MILK-LT300	3	76.2	3.42	86.9	55	40	28	24	11	100	1.20

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



FOOD GRADE



TRANSPARENT CONSTRUCTION



WATER



Phthalate FREE

FT™ Series

Heavy Duty Food Grade PVC Suction Hose

General Applications:

- Food grade liquids such as potable water, beer, wine and juice
- Food grade material handling – standard duty
- Ice transfer
- Milk and dairy product transfer
- Poultry processing
- Water suction – heavy duty

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹¹⁾ for use in meat and poultry plants.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Smooth Outer Cover** – Provides increased pressure rating and smooth surface for banding.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Approx. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
FT075	3/4	19.0	0.94	24.0	115	75	Full	28	3	100	0.17
FT100	1	25.5	1.28	32.5	100	70	Full	28	3	100	0.24
FT125	1 1/4	32.0	1.56	39.6	90	65	Full	28	4	100	0.44
FT150	1 1/2	38.1	1.80	46.5	85	60	Full	28	6	100	0.50
FT200	2	50.8	2.36	60.0	85	60	Full	26	8	100	0.71
FT250	2 1/2	63.5	2.88	73.2	65	45	Full	26	10	100	0.94
FT300	3	76.2	3.42	86.9	55	40	Full	24	11	100	1.14
FT400	4	101.6	4.51	114.6	50	35	Full	24	18	100/60	1.91
FT500	5	127.0	5.51	140.0	40	25	28	23	28	100/20	2.41
FT600	6	153.4	6.59	167.4	30	20	28	15	48	20	3.28
FT800	8	204.7	8.85	224.7	25	15	28	10	60	20	5.67

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

GTF™ Series

Food Grade PVC Ducting/Material Handling Hose

GTFE™ Series

Food Grade PVC Ducting/Material Handling Hose with Grounding Wire

GTF

GTFE
(with embedded
grounding wire)



Phthalate FREE

General Applications:

- Ducting, ventilation and fume removal
- Food grade blower and ducting systems
- Material handling – light duty
- Pharmaceutical product transfer

Construction: PVC tube with rigid PVC helix and grounding wire (GTFE Series).

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹¹⁾ (GTF only) for use in meat and poultry plants.
- **Grounding Wire (GTFE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.

- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Exposed rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Approx. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
GTF/GTFE150	1½	38.1	1.82	46.2	20	7	22	14	1	100	0.23
GTF/GTFE200	2	50.8	2.39	60.8	15	6	21	12	2	100	0.30
GTF/GTFE250	2½	63.5	2.89	73.4	10	5	19	10	2	100	0.39
GTF/GTFE300	3	76.2	3.46	87.9	10	5	18	10	3	100/50	0.50
GTF/GTFE400	4	101.6	4.50	114.3	8	4	13	7	3	100/50	0.77
GTF/GTFE600	6	152.4	6.54	166.1	6	3	7	5	6	50	1.08
GTF/GTFE800	8	203.2	8.59	218.2	4	2	5	3	8	50	1.74

NOTE: Service life may vary depending on operating conditions and type of material being conveyed. Not for liquid handling use.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



ABRASION RESISTANT



"COLD-FLEX" MATERIALS



EASY SLIDE




FOOD GRADE



OIL RESISTANT



TRANSPARENT CONSTRUCTION

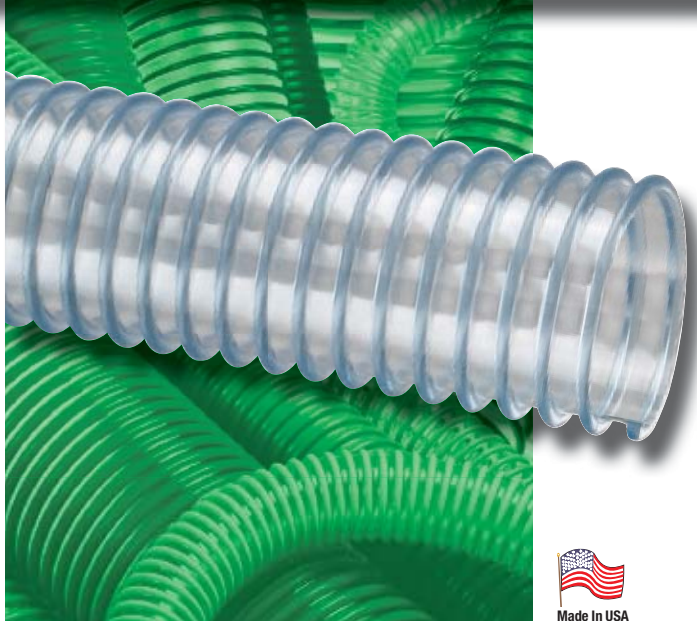

Made in USA



UVF™ Series

Food Grade Polyurethane Ducting/ Material Handling Hose

General Applications:

- Ducting, ventilation and fume removal
- Dust collection
- Food grade blower and ducting systems
- Food grade material handling – standard duty
- Pharmaceutical product transfer

Construction: Polyurethane tube with rigid PVC helix.

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*

Features and Advantages:

- **Durable Lightweight Polyurethane Tube** – Designed for dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰⁴⁾ requirements. Hose approved by USDA⁽¹²⁾ for use in meat and poultry plants.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Exposed rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Hose** – Resists most animal and petroleum based oils.
- **Now Phthalate Free!**

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Approx. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
UVF150	1½	38.1	1.82	46.2	20	7	22	14	1	50	0.23
UVF200	2	50.8	2.39	60.7	15	6	21	12	1.5	50	0.32
UVF250	2½	63.5	2.89	73.4	10	5	19	10	1.5	50	0.39
UVF300	3	76.2	3.46	87.9	10	5	18	10	2.5	50	0.55
UVF400	4	101.6	4.50	114.3	8	4	13	8	3	50	0.77
UVF500	5	127.0	5.50	139.7	7	3	10	7	4	50	0.89
UVF600	6	152.4	6.54	166.1	6	3	7	5	5	50	1.15
UVF800	8	203.2	8.59	218.1	4	2	5	3	7	50	1.75

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

BSE/TSE⁽⁰²⁾, FDA⁽⁰⁴⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.